



# TD-1060 *Slim*


Qbic's TD-1060 Slim space management system is the perfect complement to any workplace, retail, or professional location requiring a top-tier solution with a minimal footprint.

**Digital Signage | Room Booking System | POS | Interactive Platform**



## Programmable LED lights

The TD-1060 Slim is equipped with a vibrant programmable LED light bar. The true color spectrum lets you decide what colors to use and define your own status representation.

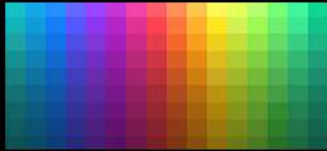

True color spectrum



## Durable IPS Multi-touch Screen

Supports 10 point multi-touch with Active Shielding technology that ensures accurate contact even with wet fingers.



With  
IPS Screen | Direct Bond  
170° wide angle view

Without  
IPS Screen | Direct Bond  
Reflective glare



**Active shielding capacitive touch**  
Works with wet finger.






## Safe & Secure

Armed with Qbic's hardened OS features, the TD-1060 Slim is free from malware, security breach and data leaks.

- Routine security patch updates.
- 802.1x protocol.
- Physical I/O lock feature.

## Specification

Model	TD-1060 Slim
<b>Features</b>	
Programming API	HTML5 / SMIL / Android API
PoE+	Yes
Beacon (BLE)	Option
Light bar	Front LED
<b>System</b>	
OS	Android 8.1
CPU	ARM Quad-core 1.5GHz (64 bit)
Memory	2GB DDR3L
Storage	16GB eMMC
Video decoder	H.264 / H.265,VC-1, MPEG-4, VP8
Image codecs	JPEG/BMP/GIF/PNG
Audio codecs	MPEG/OGG/ACC
<b>Media</b>	
Speaker	2W x 2
<b>Display</b>	
Size (inch)	10.1"
Display Resolution	1280 x 800 (16:10)
Brightness	350 nits
Contrast ratio	1000:1
Touch	Yes (Multi-touch)
Viewing angle (H/V)	170° / 170°
Orientation display	Landscape / Portrait
<b>I/O Interface ( External )</b>	
Ethernet	1 x RJ45 (10M/100M)
DC Input	Yes
USB 2.0	2 x USB2.0 type A
Audio out / microphone combo jack	1 x 3.5mm stereo (TRRS Type OMTP)
ADB	1 x Micro USB (ADB)
Storage Expansion	1 x Micro SDHC slot (Support up to 128GB)

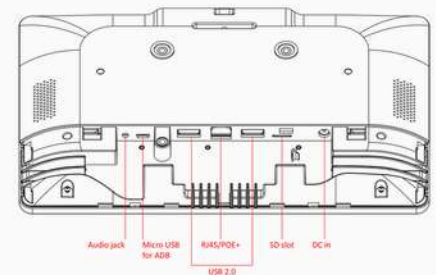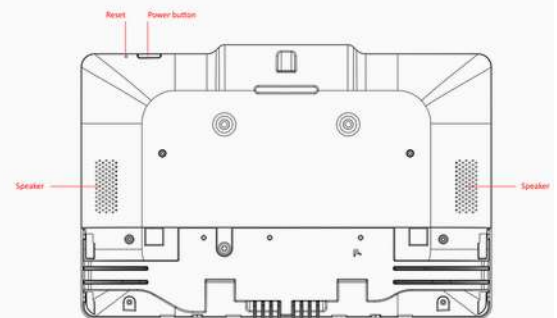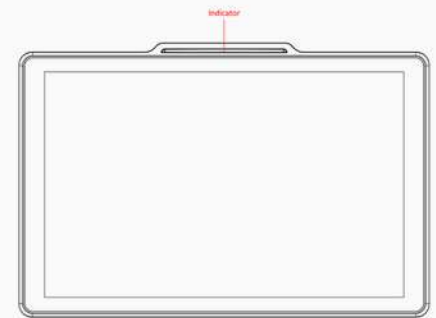

Reset Button	Yes
Power Button	Yes
<b>Connectivity</b>	
WLAN	Opt.: WLAN 802.11b/g/n/ac, 2.4 GHz/5GHz
<b>Power</b>	
Input Voltage (V)	DC 12V
<b>Mechanical</b>	
Dimension (WxDxH) (mm / inch)	248 x 166 x 20.8mm (9.76"x6.54"x0.82")
Net. Weight (Gm / Lb)	615g / 1.375lbs
Mounting type	Glass / Surface
Material	Plastic
<b>Environment</b>	
Operating Temperature (°C /°F)	Operating Temp. 0~50°C (32°F to 122°F)
Storage Temperature (package included) (°C /°F)	Storage Temp. -20°C to 70°C (-4°F to 158°F)
Ambient Relative Humidity	Humidity: 10% to 90% (non-condensing)
<b>Certification &amp; Safety</b>	
Certification	CE / FCC / BSMI / NCC / IMDA / RoHS
<b>Warranty</b>	
Warranty Period	1 yr
<b>Accessory</b>	
Adapter	Option: DC 12V, 1.5A AC-00M(EN) / AC-00N(UK) / AC-00O(US) / AC-00G(SG)
Bracket Kit	Option: AC-140 (Screws*1, Bracket*1, Tape*1)
IO Cover	Yes
Screw	Yes
QSG	Yes